


944 928 968 LED Installation-

1. Disconnect battery or fuse line to gauges.
2. Remove Gauge Cluster.
3. Remove the bulbs to be replaced.




4. Remove the 3 reflective plate holders.

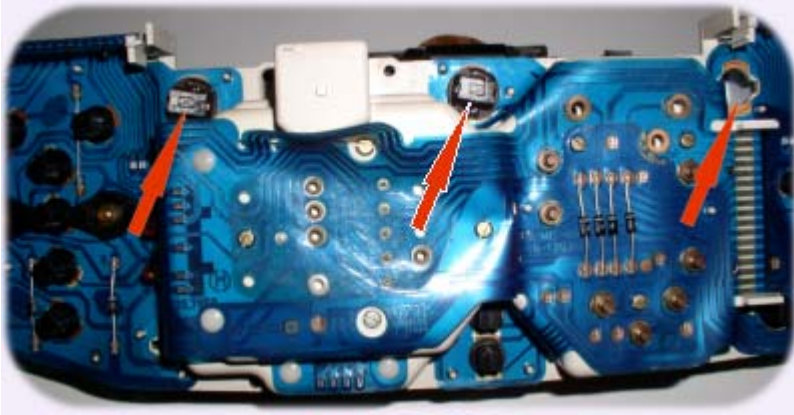


5. Remove the 3 reflective plates.



6. Install the LED light bars and thread the wire through the old holes. They will simply snap in. Even though the side tabs are not there, they are not needed. If you want extra security (not really needed), put a small spot of glue or double-sided tape on each bar.

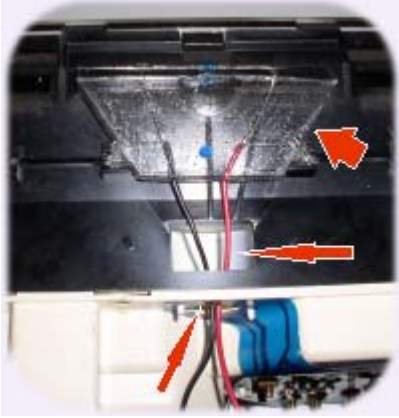

7. Solder the Red (+) and Black (-) wires as shown below. Be careful not to solder through the blue plastic. *You may also solder the wires to the plastic bulb holder that was removed, but insure the red and black wires touch the correct sides when you twist it back in.*

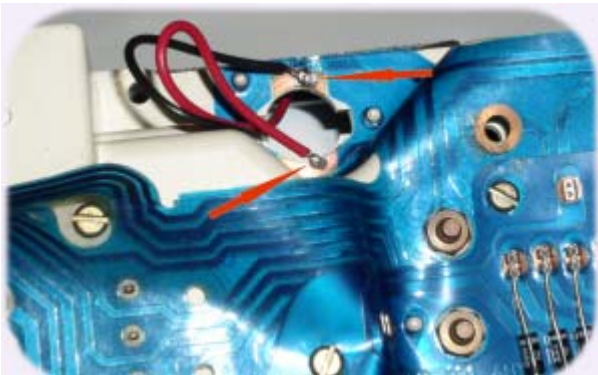

8. Reconnect the gauge cluster harness plugs and test lights before reinstalling the cluster.

9. Reinstall gauge cluster and fuse (or battery cable).

Questions or Suggestions???? email: julian914@earthlink.net

Thank You for your order

-JULIAN