

 **Closing the top**

The top can only be operated with the parking brake set.

1. Take off the cover.
2. Turn ignition key to ignition lock position 2 (engine running or not running).
3. Operate the rocker switch until the indicator light goes out (top locked in windshield frame). If while operating the top a hazardous situation develops, release the top operating switch. This will immediately interrupt the operation of the top.

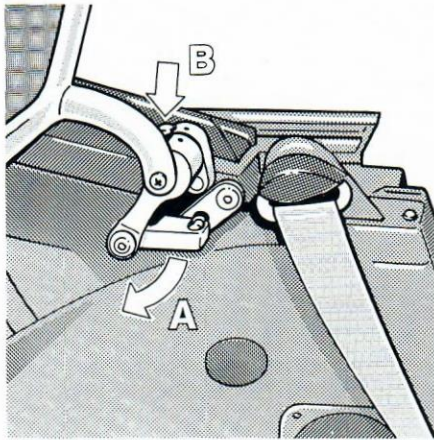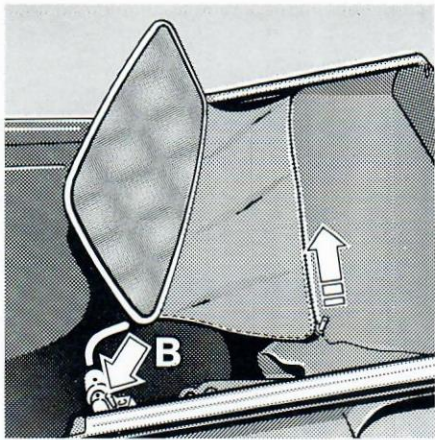

Windstop

The installed windstop can be placed in a lowered position toward the rear of the vehicle.

Removal

1. Open convertible top completely.
2. Unzip the windstop flap from the convertible top material.

3. Disconnect the windstop frame from the ball socket at the left by rotating the pivot arm (arrow A).
4. Pivot the windstop until the colored markings align on the left side mounting. Then press the colored knob (arrow B). Pull the windstop out of the left mounting point.

5. Pull the windstop out of the right side mounting.

Install the plastic cap on the ball socket.