

## LOWERED FRONT PLATE ATTACHMENT INSTRUCTIONS

Aluminum  
Bracket

Machine  
Screws (6)  
(4) 1/2" lg  
(2) 5/8" lg



Plugs (2)

Plastic  
nuts (4)

U-Nuts (2)

1. Remove old front license plate
2. On included paper drilling-template:
  - a. Cut out (2) 3/8 diameter holes
  - b. Cut along line shown
3. Use both plastic plugs to attach template to car using existing square holes




4. Fold template into duct area and mark (2) holes for drilling
5. Drill (2) .20"-.25" diameter clearance holes
  - a. Do not apply too much force as plastic drills very easily.

**Caution: Do not touch car with drill motor!**



6. Slide on (2) U nuts
  - a. Orient thread side toward "inside" of car
  - b. Push grill slightly toward rear of car to ease installation

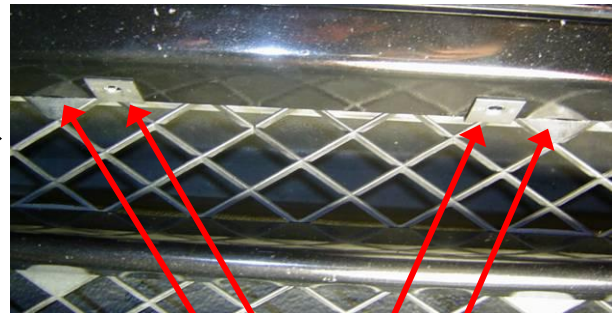

7. Attach new license plate bracket -  
(2) 5/8" lg

8. Insert plastic nuts

9. Attach license plate -  
(4) 3/8" lg



U-Nuts  
Grill Tabs  
Reference