


RSS 4 POINT COMPETITION ROLLBAR FOR PORSCHE® MODELS

INSTALLATION BY A PROFESSIONAL TECHNICIAN IS HIGHLY RECOMMENDED


- Remove all underside panels under car.
- Remove seats.
- Remove the inner sills driver, and passenger.
- Loosen the lateral trim panels.
- These panels must be loosened in order to remove the wiring loom covers for trimming/cutting.
- If removed be sure to loosely install prior to final installation of main hoop.
- Remove fuse panel cover and plastic trim.
- Remove wiring loom covers for trimming/cutting.
- Remove carpet section covering the top of the rear shock towers.
- Loosely install mounting plates that connect to the rear shock towers, as well as the lower mounts for the main hoop.
- Install the 4 point and loosely bolt together all couplers.
- Position base plates on passenger compartment floor and as far to the outside and rear of the car as the main hoop will allow.
- Then drill the three holes necessary per side being careful not to damage any lines that run under the car.
- Bolt the main hoop to the floor using the provided hardware and plates.
- Tighten all connections and couplers of the roll bar in preparation for interior assembly.
- Trim/cut wiring loom covers to clear main hoop and base plates.
- Carefully trim/cut carpet to clear main hoop.
- Reinstall fuse panel cover and plastic trim.
- Reinstall lateral trim panels.
- Carefully trim/cut rear carpet to clear shock tower mounts.
- For trimming/cutting the rear carpet it may be easiest to remove the black foam pieces that are adhered to the bottom of the carpet.
- To do so just pull on them as they are held down by double sided tape.
- Reinstall inner sills driver and passenger.
- Reinstall all underside panels under car.
- Reinstall seats.




Front Legs Bolt To Floor Underneath Carpet
Note: Subtle Notching of Carpet Required

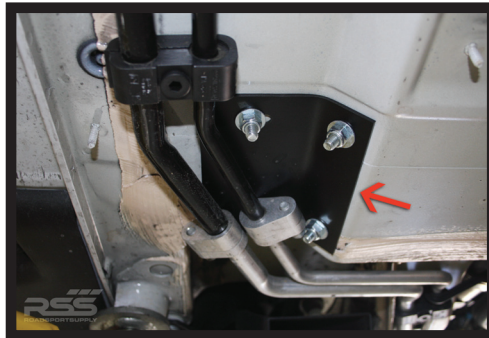

3 Holes Drilled for Underplate Installation

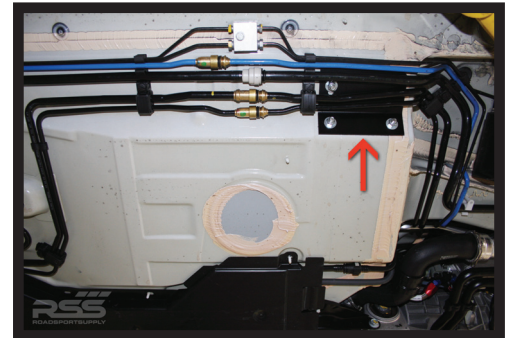


View from Under Car, Underplate Installation

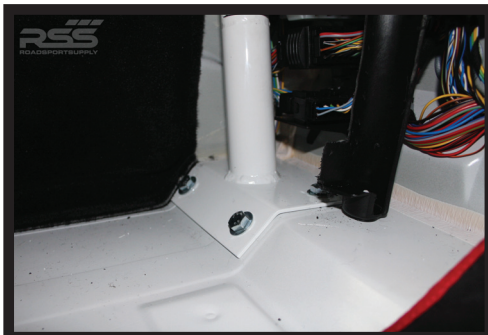

Front Legs Bolt To Floor Underneath Carpet
Note: Subtle Notching of Carpet Required



Rear Extensions Bolt To Rear Shock Towers
Note: Subtle Notching of Carpet Required

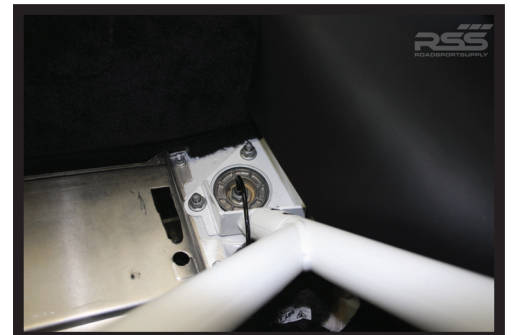

Rear Extensions Bolt To Rear Shock Towers
Note: Subtle Notching of Carpet Required