


Entfernen Sie die Dachkonsole. Setzen Sie den Airlift-Suspension-Schalter ein und schieben Sie die Platine der Fernbedienung in den Frontscheibenrahmen (siehe Pfeil). Schließen Sie die Kabel analog dem nächsten Bild an.

Remove the roof consol. Fit the Airlift-Suspension-Switch and slide circuit board of remote control in front windscreen frame (see arrow). Connect wires according to next picture.

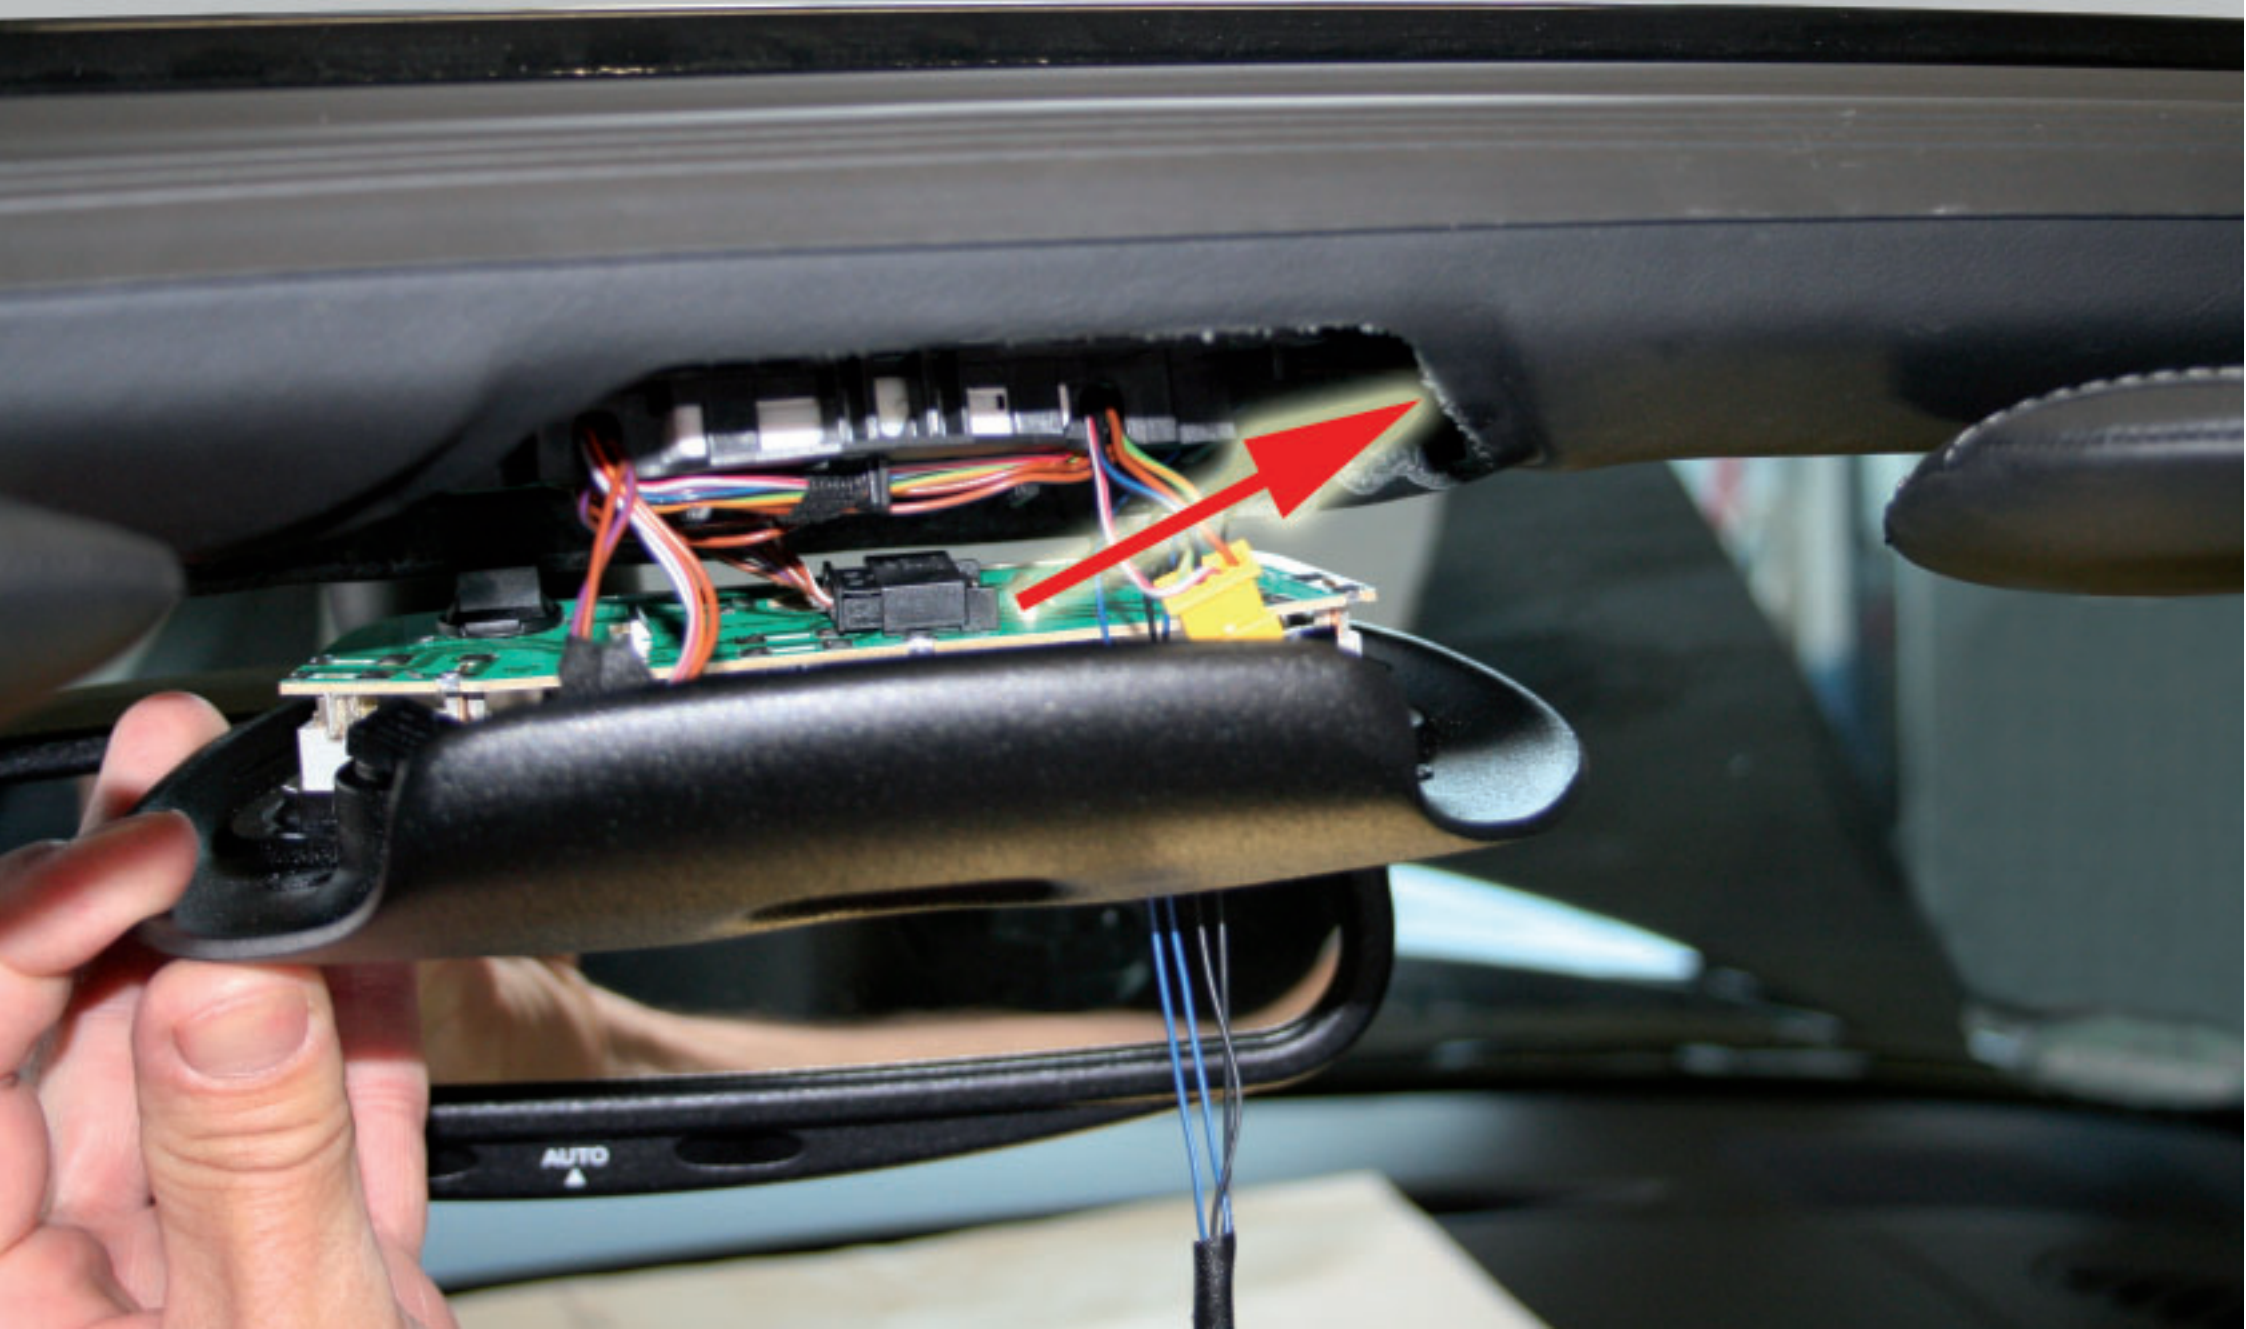

Schließen Sie die Kabel folgendermaßen an:

- braun an braun
- + rot an braun/blau

Folgen Sie nun der Anleitung „Wie programmiere ich die Fernbedienung“.


Anstatt der Knöpfe auf dem Handsender benutzen Sie die Knöpfe des Dachkonsolenschalters. Der mitgelieferte Handsender bleibt ebenfalls aktiv.


Please connect the wires accordingly:

- brown to brown
- + red to brown/blue

Please follow the Instructions „How to program the RC“.

Instead of the buttons on the remote control use the buttons of the roof consol switch. The remote control remains active also.

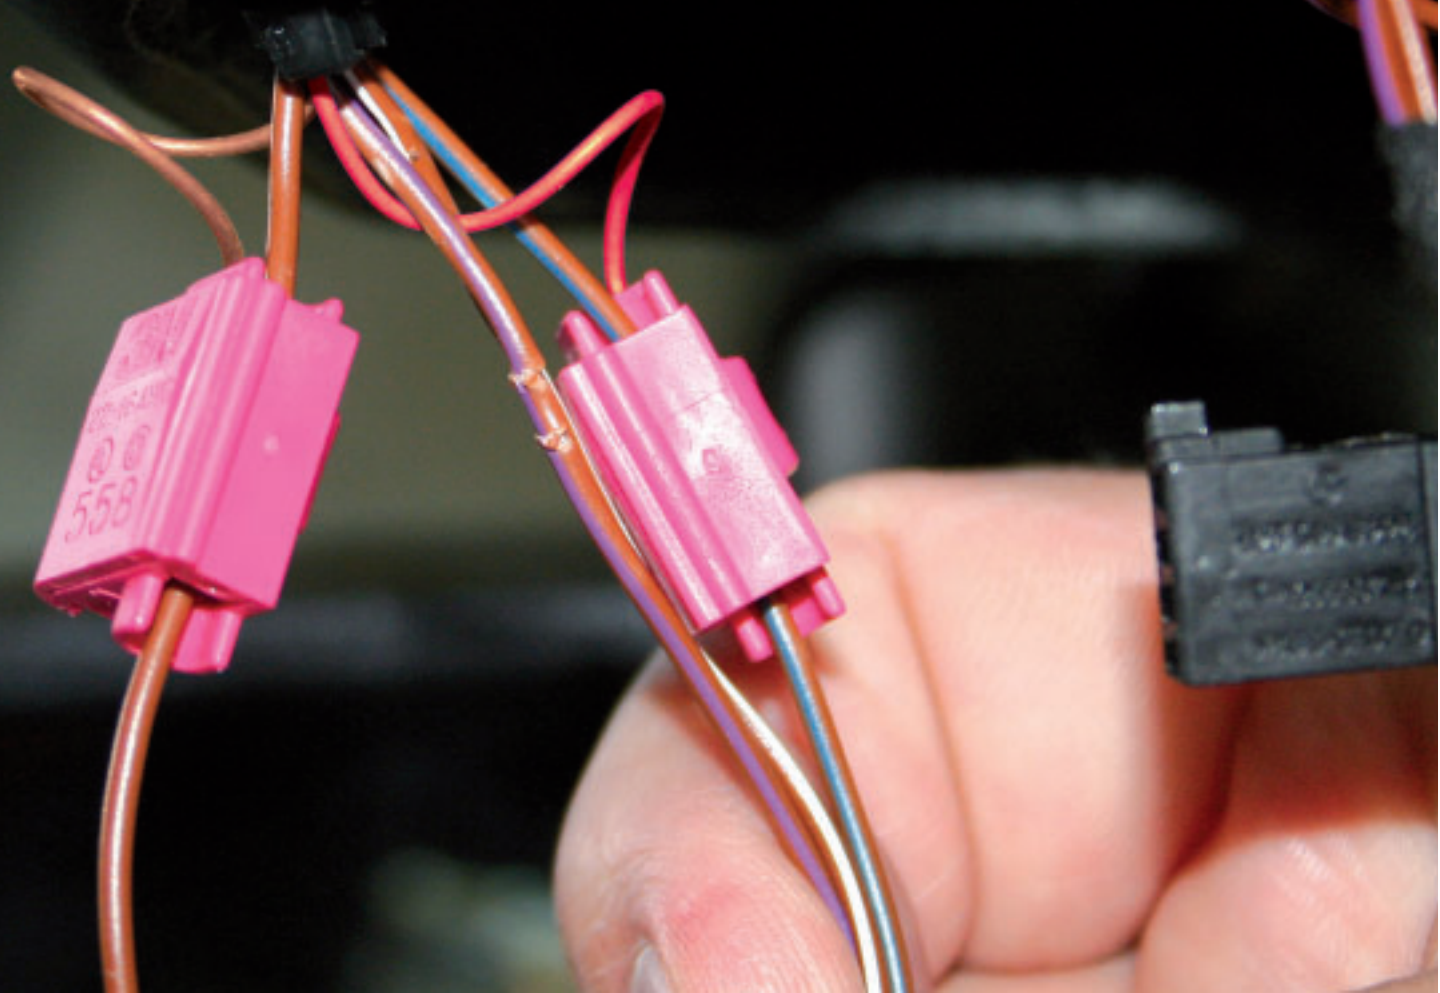

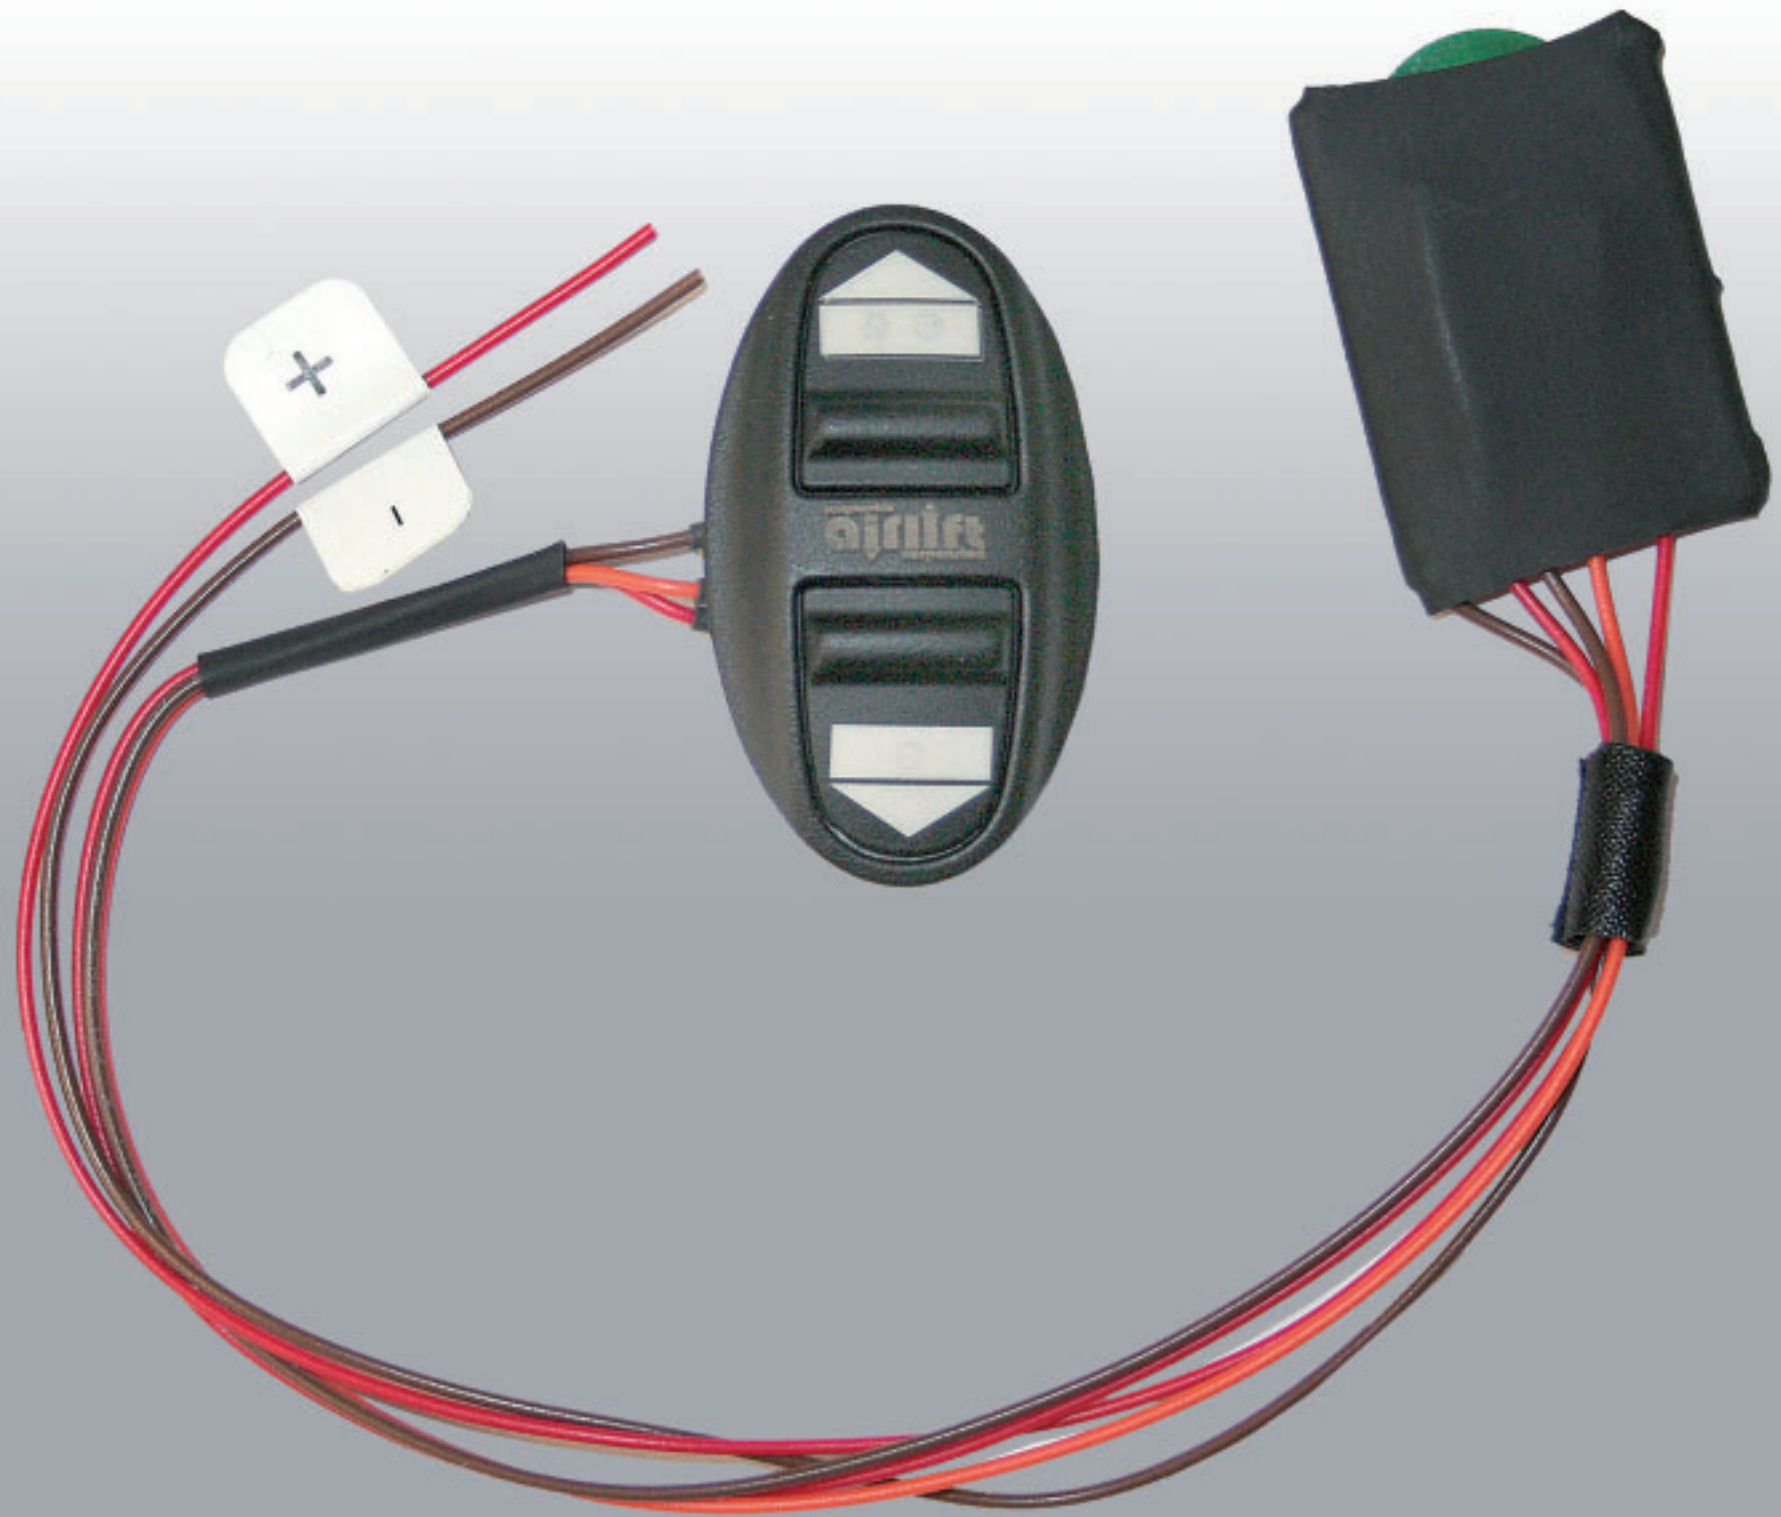

HOW TO PROGRAM THE RC pg 1



START



PUSH RED BUTTON
LEFT LIGHT ON



PUSH RED BUTTON ON RC
UNTIL RED LEFT LIGHT OFF

HOW TO PROGRAM THE RC pg 2



RELEASE BUTTON



LEFT LIGHT GOES ON



PUSH RED BUTTON
RIGHT LIGHT ON

HOW TO PROGRAM THE RC pg 3



PUSH RIGHT BUTTON ON RC
UNTIL RED LIGHT OFF



RELEASE BUTTON



RIGHT LIGHT GOES ON

www.

cargraphic®
.com

HOW TO PROGRAM THE RC pg 4



RED LIGHT OFF
RC READY