

**Step 1: Place floor jack on right rear jack point. Place front right jackstand**



1Jack1320.jpg

**Step 2: Place 2nd floor jack on suspension point shown. Lift car to remove 1st floor jack. Alternative (slower) with only 1 floor jack is to lower it and move it to the suspension point. Place right rear jackstand. Remove floor jack.**




2Jack1321.jpg

**Note how elevating by rear suspension point frees up the rear jack point.**



3Jack1323.jpg

**Step 3: Move lifts to other side. Start by elevating with floorjack on left rear jack point.**

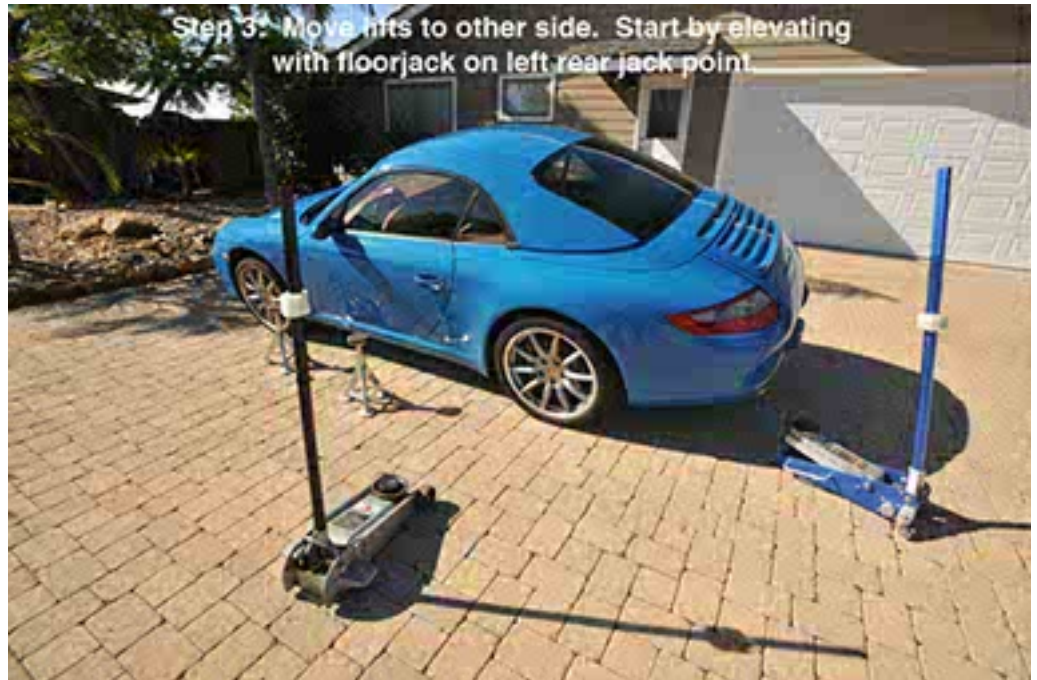

4Jack1324.jpg