

# 997.1 GT3 OIL CHANGE DIY

Parts Needed	Part #	QTY
Oil Filter with large O-Ring	997 107 225 53	1
Small O-Ring	999 707 465 40	1
Copper Sealing Ring - Oil Tank	900 123 010 20	1
Aluminum Sealing Ring - Engine	900 123 118 30	1
Mobil One 0W-40	Dealership / Walmart	9.5 qts

Tools Needed	QTY
Jack with Jack Stands or Lift	1
15mm socket - engine	1
27mm wrench - oil tank	1
19mm socket - oil tank	1
Oil Filter wrench	1
Oil catch pan	2 (Crankcase and Oil Tank)
Torque wrench	1

## Procedure


**Step 1:** Warm up engine to operating OIL temp ( ~175F / 80C )

**Step 2:** Jack up car and put jack stands underneath or put car on lift

**Step 3:** Remove 15mm engine crankcase oil drain plug

- Note the aluminum washer and bolt. Bolt threads are same for oil tank bolt also

**Step 4:** Drain oil into catch pan. Leave unplugged because when you remove the oil filter, more oil comes out

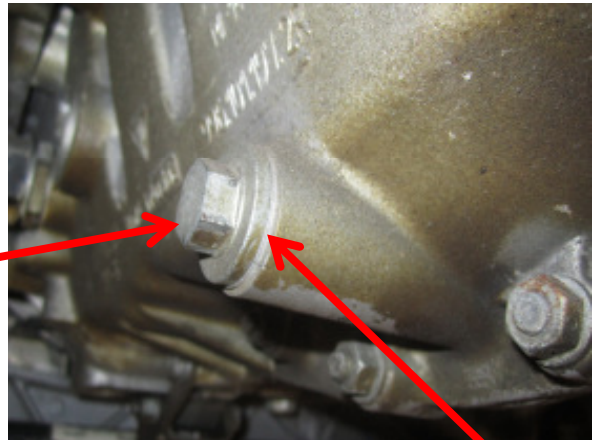

15mm bolt with aluminum crush washer

