


4. Unscrew T30 plastic screw and remove retaining plug.



Retaining plug

5. Unscrew four T30 Torx between lights on top of rear bumper cover.
On either side in the upper fender well close to rear tires remove two T30 screws (one each side).

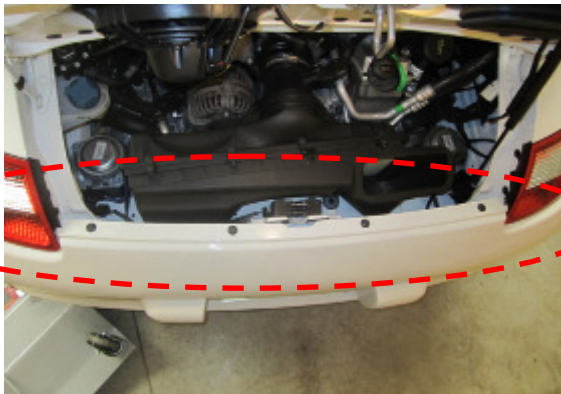


These screws



6. Underneath car, there are three T30s on each side that need to be removed. Then carefully pull either side from front corner to pull bumper cover out from clips on the chassis.

Now you are ready to pull the bumper off. It's a good idea to use two people for this procedure as there is a rear license plate light on the inside of the bumper cover that needs to be disconnected at the same time. Now the bumper cover is off.

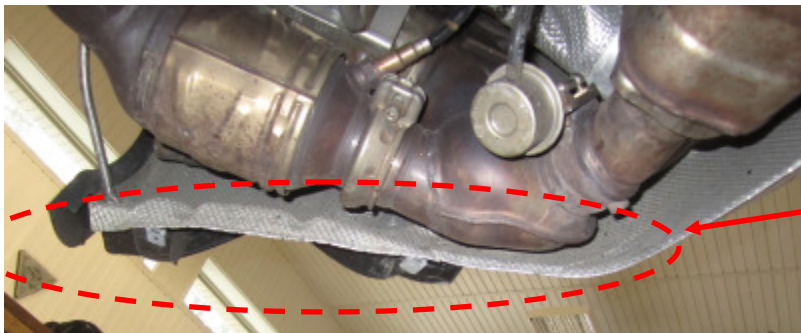

These screws