


Side Muffler Removal

Before removing any nuts you must lubricate the threads with some type of penetrating lubricant (liquid wrench)

10. Only the left-side muffler needs to be removed. The right side just needs to be loosened. On the left-hand side, loosen and remove internal hex-bolt (6mm) on V-band clamp just after the catalytic converter. Then open and slide clamp back out of the way. For the right hand side muffler you just need to loosen the screw slightly

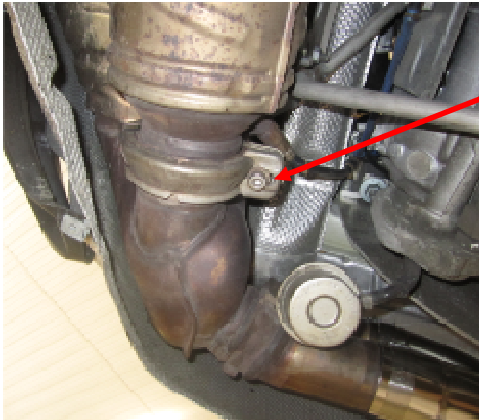

Loosen this screw

11. Next remove 13mm nuts on the left-hand side muffler mounting bracket on the inside (These face towards the center of the car). On 2007-2008 models, there are 3 nuts. On 2010+ GT3 models, there are 2 nuts.