


13. Next remove the left-hand band clamp that secures the center muffler to the engine bracket and also loosen the right hand clamp. The left hand muffler will now pull out of the center muffler with some effort. Then fully remove the right hand band clamp that you loosened earlier and pull the center muffler from side muffler pipes.

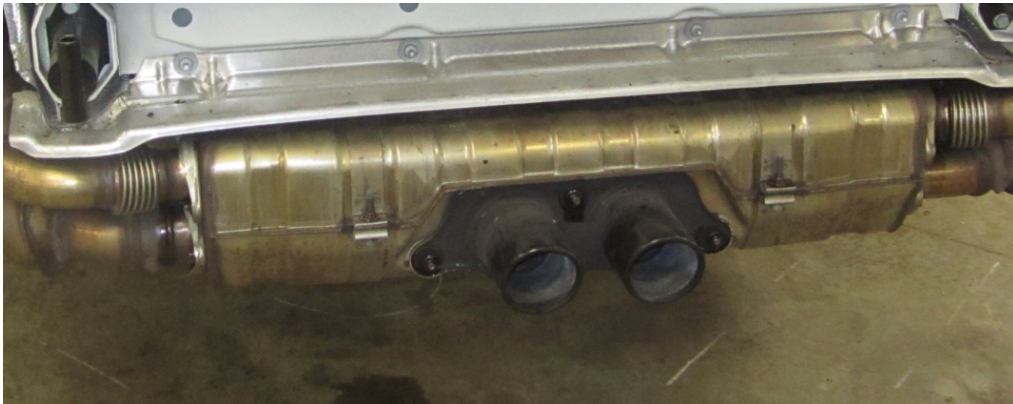

Cool exhaust valves that open with sport button