



TrailBrake.net

Learn to go faster⁰⁰⁰


Data Analysis and Equipment Sales

B520BU-24K-4F



K-Type, Embedded Brake T/C, Ungrounded Junction, 1/8 or .125 Brake Cap, 24inch. Fiberglass Insulated Stranded Wire, Open Leads

B5M10X1.0X062

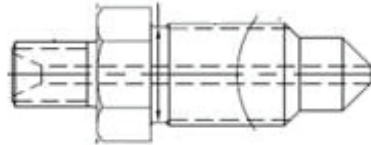

Custom Bleeder Screw / Compression Fitting Combo, Stainless Steel Ferrule .062 or 1/16 X M10X1.0 Thread

T21MU-3K-A510



.062 or 1/16 X 3 Inch, K-Type, Ungrounded Stainless 310 Probe, Molded On Mini-Plug

T21MU-3K-CS10



.125 or 1/8 X 3 Inch, K-Type, Ungrounded Stainless 310 Probe, Molded On Mini-Plug

185F-125

.125 or 1/8 X 1/8 NPT Stainless Steel Compression Fitting, Stainless Ferrule

185T-125

125 or 1/8 X 1/8 NPT Stainless Steel Compression Fitting, Teflon Ferrule


T52MEGD-24K-2K-30

(30GA. K30-2-512 / 1-1/16 inch Glass Adhesive Disk)



K-Type Encapsulated Wire Thermocouple / 1-1/16 inch Glass Adhesive Disk / 24inch, 30GA Solid Wire Kapton Insulation (K30-2-512) / Molded on Mini-Plug / Shrink Strain Relief

RUBBING-TC-K-U-HP-4G

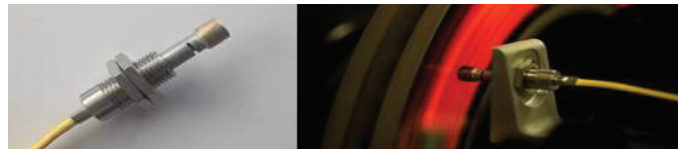

High Performance, K-Type, Ungrounded Junction, Rubbing T/C, 36IN, Stranded 24Awg. Open Wire Lead, High Temp Fiberglass Wire Insulation, Grounded



TrailBrake.net

Learn to go faster⁰⁰⁰

Phone: **603-674-3250**

Email: matt@trailbrake.net

Web: <http://www.trailbrake.net>