

CENTER CONSOLE - AS OF MY 2003 (ALL MODELS)

REMOVING RELEASE FOR ARMREST ON CENTER CONSOLE

Removing armrest release

NOTE: If the lid cannot be opened, the lid release can be removed using a stop-gap measure. --> Emergency operation of release

In vehicles with phone handsets in the armrest, the entire armrest must be replaced. --> 681737 Removing and installing armrest for center console

Installation Location:

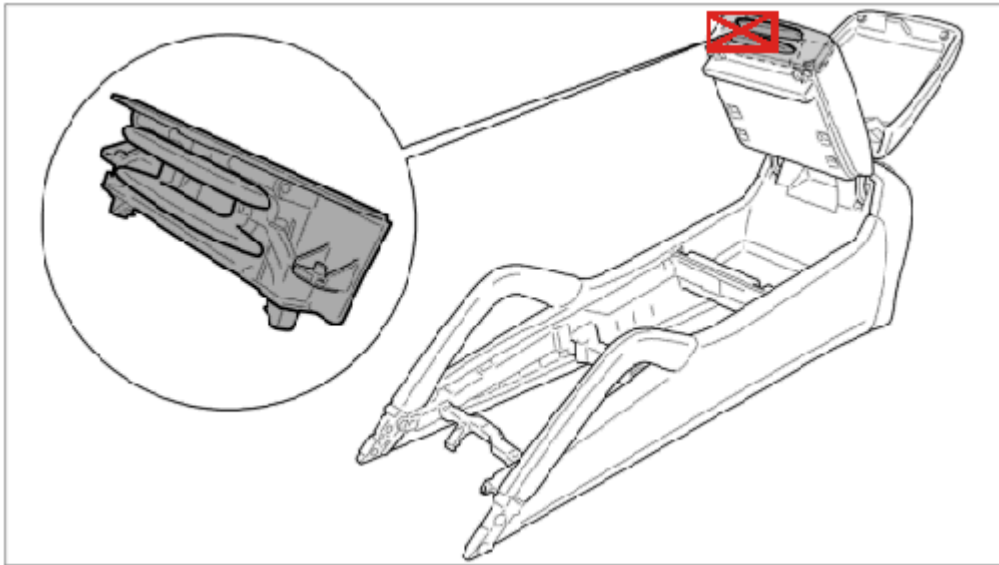


Fig. 94: Removing and installing armrest release

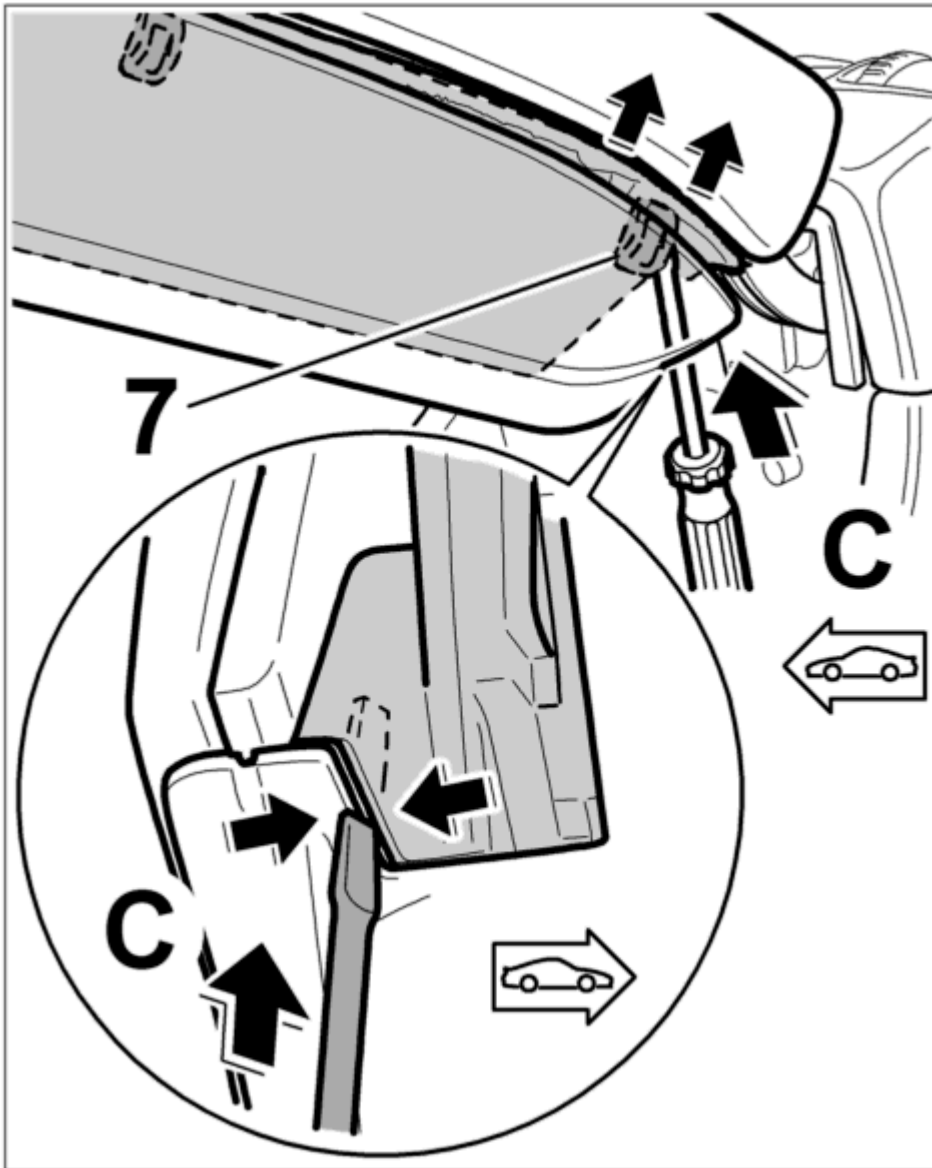


Fig. 102: Unclipping shelf

Courtesy of PORSCHE OF NORTH AMERICA, INC.

3.1. Insert a screwdriver into armrest at the rear between the bottom half and the hinge -arrow C- and lever out the rear clip connection -7- . See **Fig. 102**.

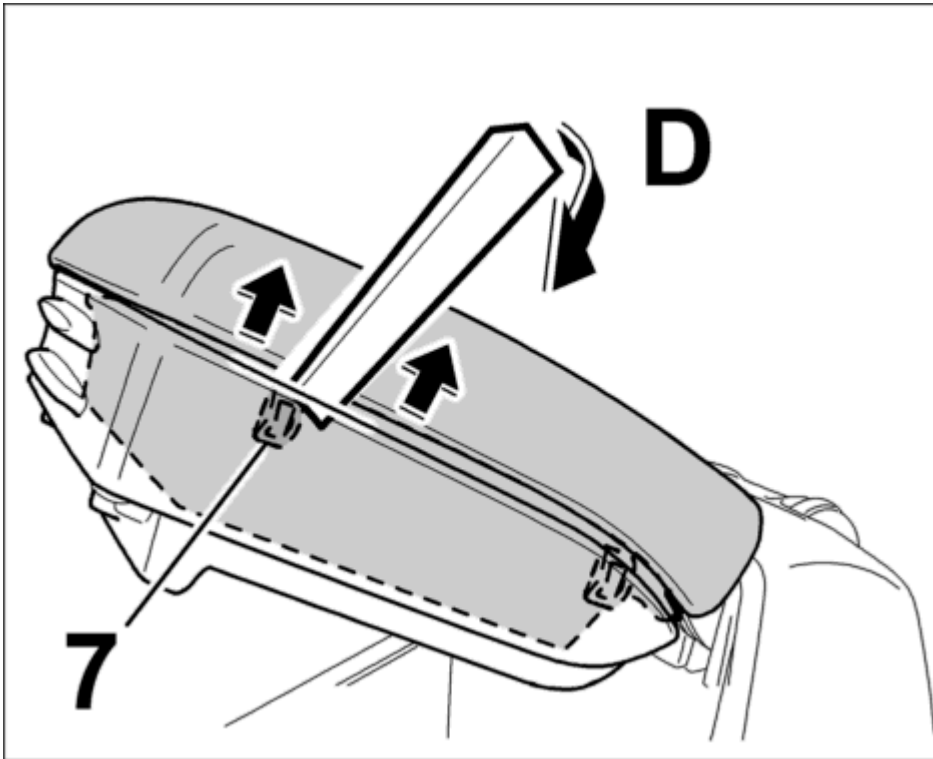


Fig. 103: Unclipping shelf

Courtesy of PORSCHE OF NORTH AMERICA, INC.

3.2. Insert an assembly wedge into armrest between the bottom half and the shelf tray **-arrow D-** and lever out the front clip connection **-7-** . See **Fig. 103.**

4. Remove bottom half.

4.1. Operate release buttons **-arrow E-** . See **Fig. 104.**

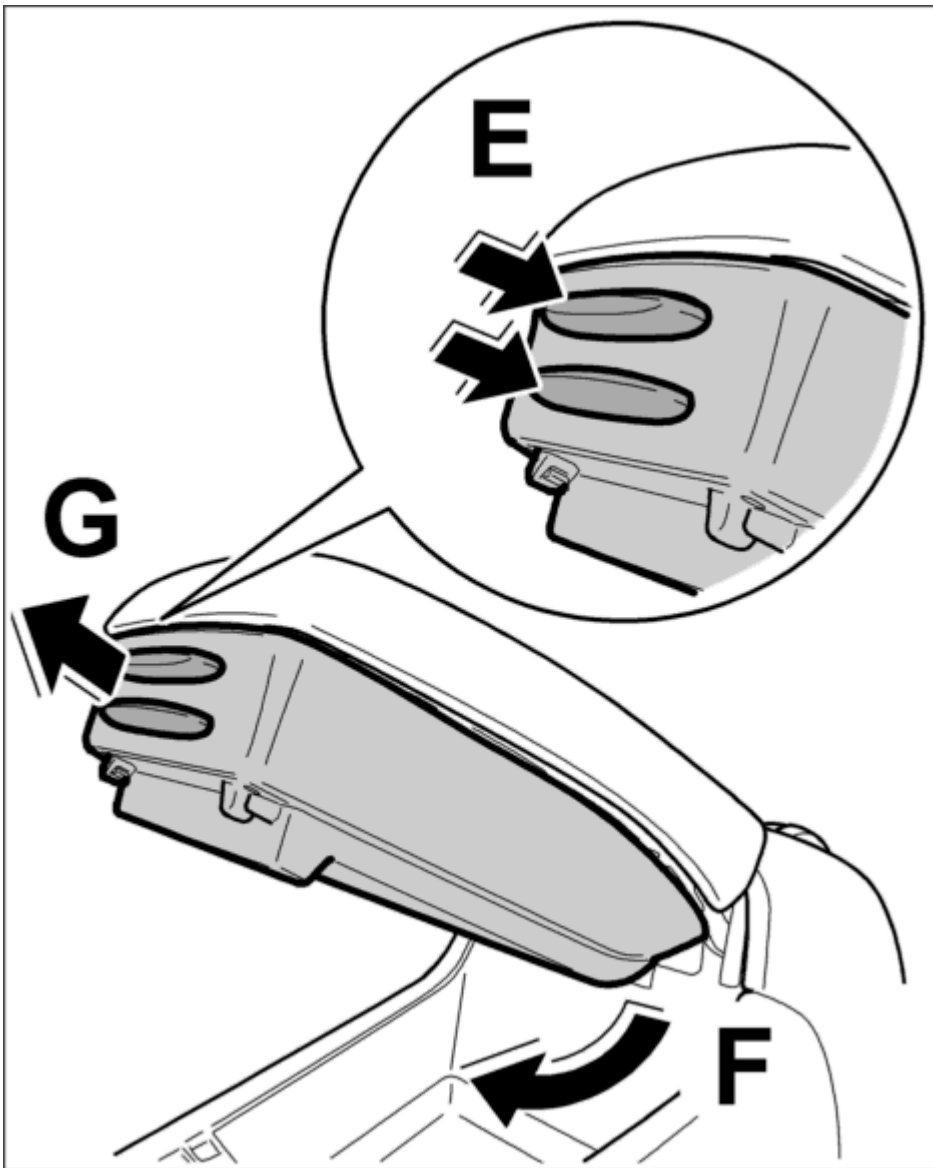


Fig. 104: Removing bottom half

Courtesy of PORSCHE OF NORTH AMERICA, INC.

Swivel bottom half out -arrow F- and remove -arrow G- . See **Fig. 104**.

INSTALLING ARMREST RELEASE

Installing armrest release

Installation Location:

2006 Porsche Cayenne

2003-2008 ACCESSORIES & EQUIPMENT Interior Equipment

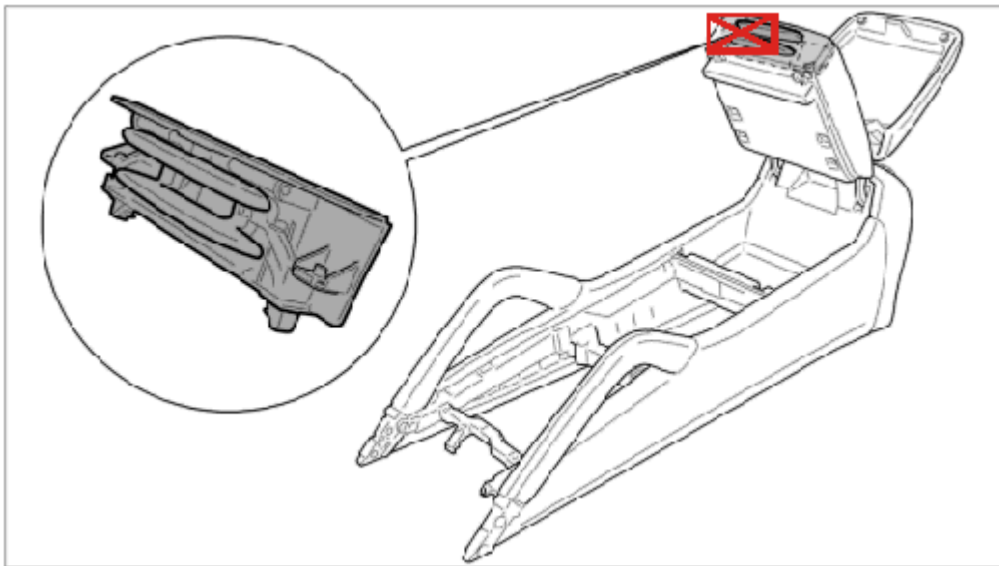


Fig. 105: Removing and installing armrest release

NOTE:

- *Only on center consoles in which the release was removed using the stop-gap measure.*

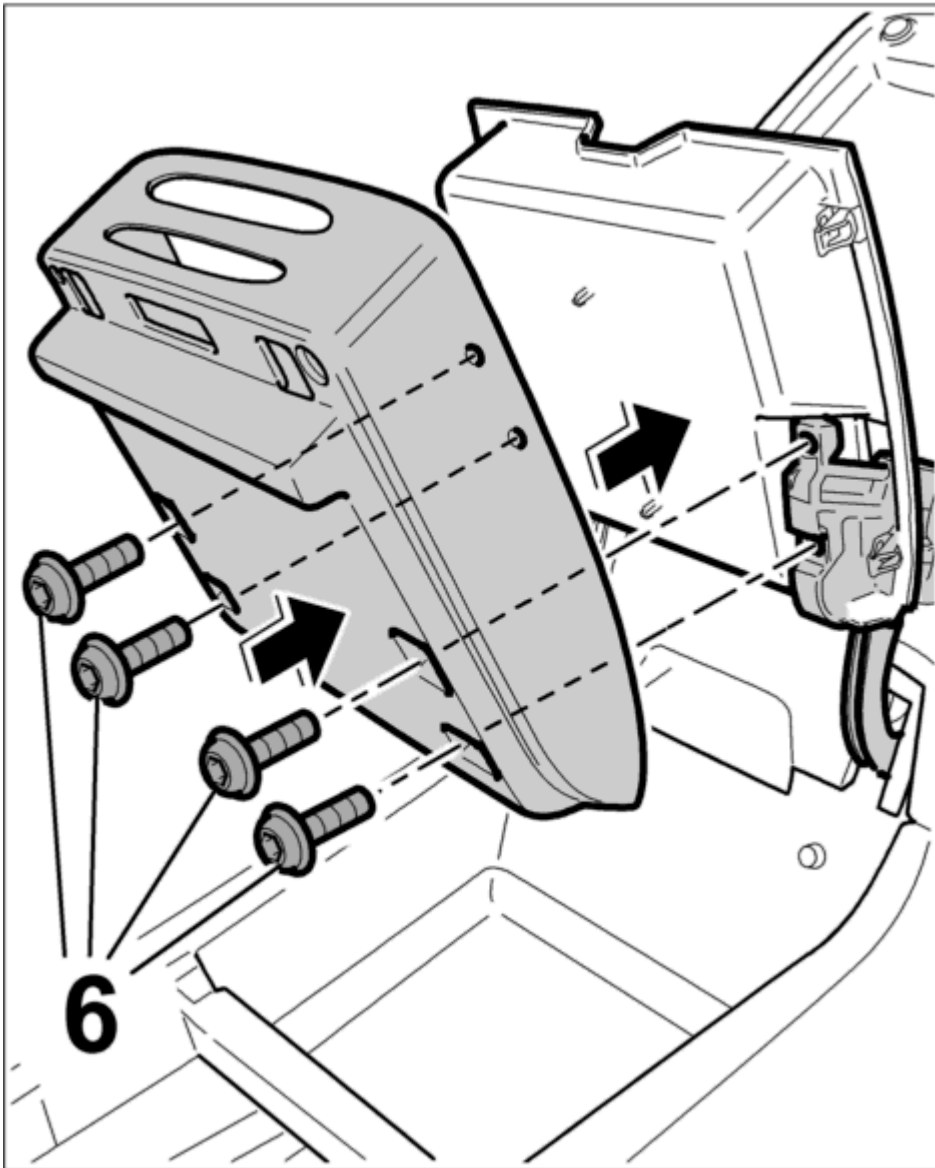


Fig. 106: Installing bottom half

Courtesy of PORSCHE OF NORTH AMERICA, INC.

1. Place bottom half in position and screw in tightening screws -6- . --> **Tightening torque: 8 (6 ftlb.) Nm** . See **Fig. 106**.