



US 20080245613A1

(19) **United States**

(12) **Patent Application Publication**  
**Rutschmann et al.**

(10) **Pub. No.: US 2008/0245613 A1**

(43) **Pub. Date: Oct. 9, 2008**

(54) **INTERNAL COMBUSTION ENGINE WITH PRESSURE LUBRICATION BY THE DRY SUMP PRINCIPLE**

(86) PCT No.: **PCT/EP2005/003992**

§ 371 (c)(1),  
(2), (4) Date: **Sep. 15, 2006**

(75) Inventors: **Erwin Rutschmann**, Tiefenbronn (DE); **Thorsten Wieg**, Pforzheim (DE)

(30) **Foreign Application Priority Data**

Jun. 23, 2004 (DE) ..... 10 2004 030 353.3

**Publication Classification**

(51) **Int. Cl.**  
**F01M 1/04** (2006.01)

(52) **U.S. Cl.** ..... **184/6.5; 123/196 R; 184/6.13**

(57) **ABSTRACT**


An internal combustion engine having pressure lubrication according to the dry sump principle, in particular for an opposed cylinder engine, has a crankcase in which an oil suction space (dry sump) is formed in the lower part. The lubricant oil is conveyed from the oil suction space to an oil supply container (wet sump) via an oil return pump equipped with an oil suction line. The lubricant oil in the oil supply tank and/or in the oil supply space is conveyed to the consumer via a main delivery pump. An annular space arranged around the cylinder is provided as part of the oil returned to the oil supply tank.

Correspondence Address:  
**CROWELL & MORING LLP**  
**INTELLECTUAL PROPERTY GROUP**  
**P.O. BOX 14300**  
**WASHINGTON, DC 20044-4300 (US)**

(73) Assignee: **Dr.Ing. h.c.F. Porsche**  
**Aktiengesellschaft, Stuttgart (DE)**

(21) Appl. No.: **10/592,931**

(22) PCT Filed: **Apr. 15, 2005**

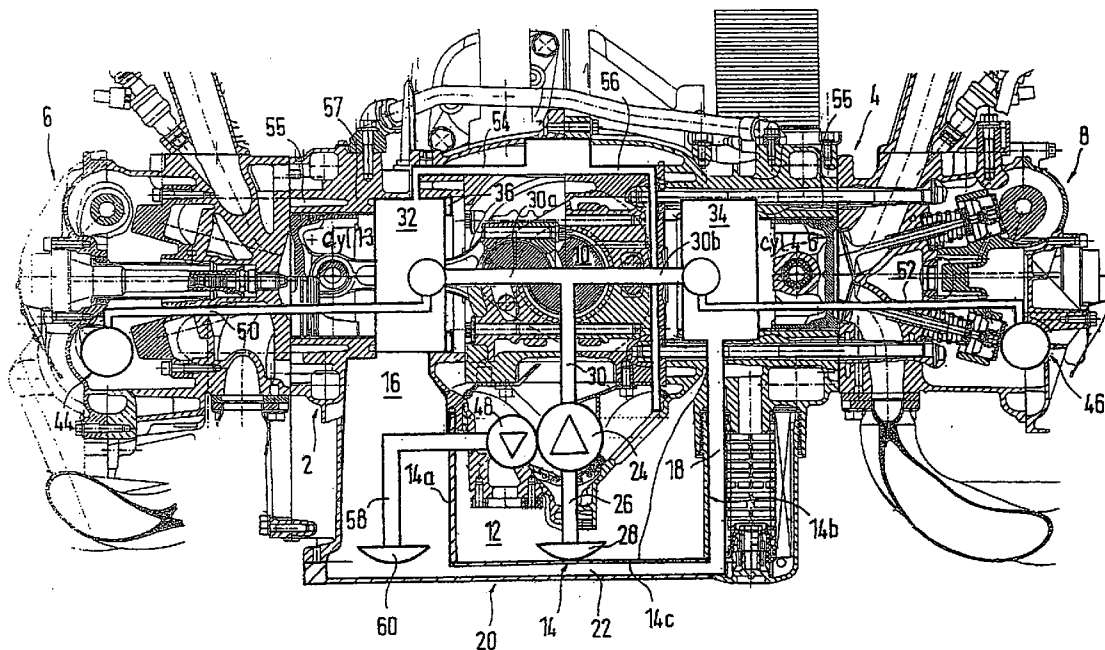

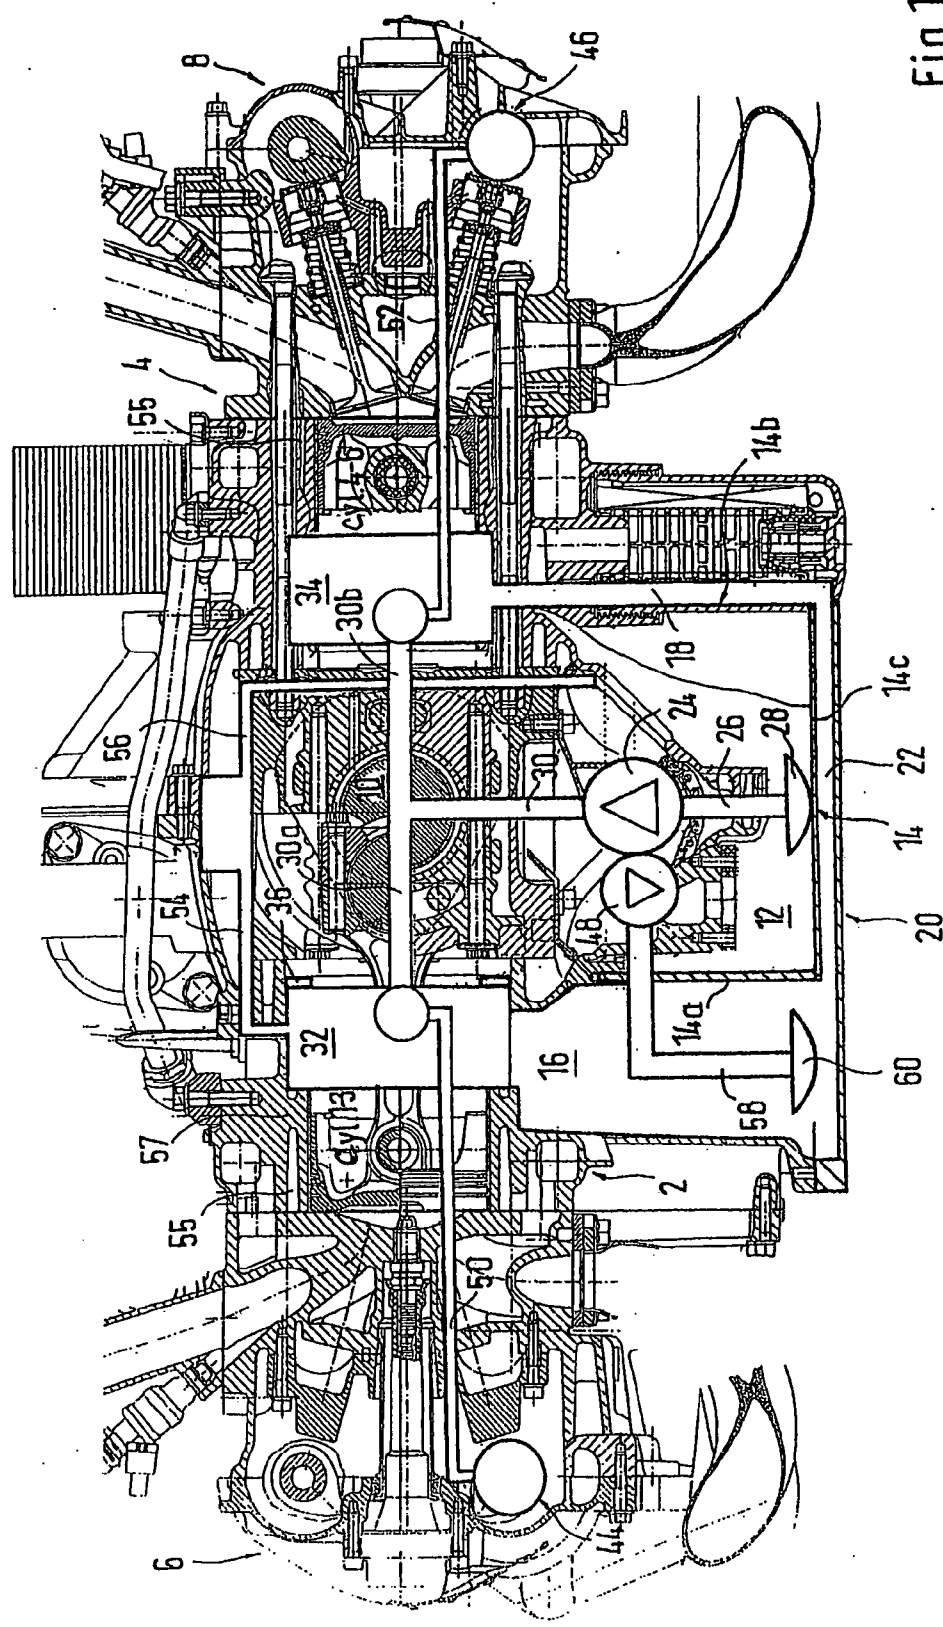


Fig. 1

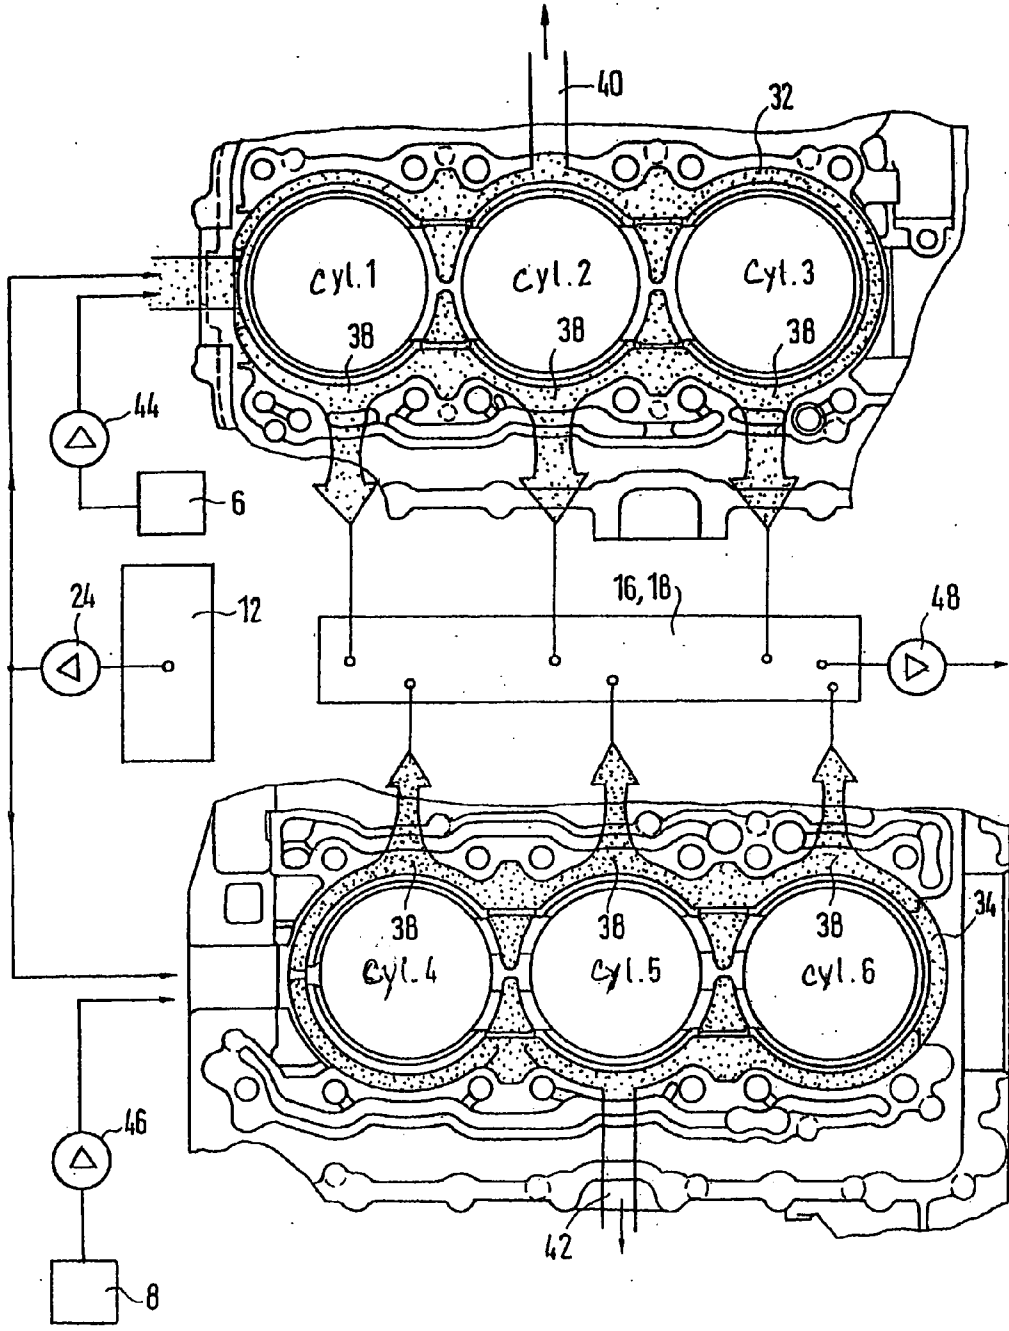


Fig. 2

**INTERNAL COMBUSTION ENGINE WITH  
PRESSURE LUBRICATION BY THE DRY  
SUMP PRINCIPLE**

BACKGROUND AND SUMMARY OF THE  
INVENTION

**[0001]** The present invention relates to an internal combustion engine with pressure lubrication according to the dry sump principle, in particular for an opposed-cylinder engine.

**[0002]** With today's water-cooled six-cylinder opposed-cylinder engines of the 911 Carrera model series (Dr. Ing. h.c. F. Porsche A G), an oil bulkhead tank in which the oil sump for the lubricating oil supply to the engine is formed is provided in the oil carrying casing and/or in the oil pan. The oil lubricant recycled by the various consumers back to the oil pan is first returned outside of the oil bulkhead tank forming the oil suction space before entering the actual oil suction space through openings monitored by valves in the oil bulkhead tank.

**[0003]** In engines with dry sump lubrication, the oil flowing back into the oil pan is conveyed by a suction pump into a separate oil tank or oil supply container from which the pressure oil delivery pump sucks out the lubricant and forces it to the lubrication points through filters and oil coolers, if necessary. In most cases the oil tank is mounted on the outside of the crankcase and has corresponding connections for the oil pressure lines laid externally.

**[0004]** An object of the present invention is to provide a low-friction driving gear with dry sump pressure lubrication for high-speed operation in particular to increase the specific power of an internal combustion engine; in this type of operation, the components required for pressure lubrication of the internal combustion engine are largely integrated into the engine in a space-saving manner.

**[0005]** This object has been achieved according to this invention by providing an annular space around the cylinders as part of the oil return to the oil supply container.

**[0006]** According to this invention, a portion of the oil be recycled into the oil supply container and/or into the wet sump space through the annular spaces.

**[0007]** In particular, with cylinder crankcases of the open-deck configuration in which the water jacket is provided only in the upper part of the cylinder, there remains an annular space which is open toward the crankcase space and which can be used as part of the oil return line into the wet sump with an appropriate seal at the end. A gland made of, for example, plastic may be provided as the seal for the annular space.

**[0008]** When the (wet sump) oil-collecting space is arranged beneath the annular spaces provided for the oil return and/or integrated into the crankcase, the lubricating oil can be transferred directly from the annular space into the oil-collecting space(s). It is thus now possible to largely eliminate external oil lines so that this measure contributes to a compact and inexpensive implementation of an internal combustion engine with dry sump lubrication.

**[0009]** On the basis of the horizontal arrangement of cylinders in an opposed-cylinder engine, the annular spaces which are used for the lubricating oil return can be vented toward the top and the lubricating oil can be defoamed.

**[0010]** Other objects, advantages and novel features of the present invention will become apparent from the following

detailed description of the invention when considered in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

**[0011]** FIG. 1 is a cross-section view of a dry sump oil circulation of an internal combustion engine, and

**[0012]** FIG. 2 is a basic view of the oil return in the area of the cylinders for the engine shown in FIG. 2.

DETAILED DESCRIPTION OF THE DRAWINGS

**[0013]** FIG. 1 shows the principle of a dry sump oil circulation system, which is not intended to be limited to this particular illustrated embodiment, for a six-cylinder opposed-cylinder engine, the parts of which that are necessary only for a description of the oil circulation are described in greater detail below with reference to the figures. The engine has two crankcase halves **2, 4**; a cylinder bank row "1" through "3" and "4" through "6" is arranged in each half. A cylinder head **6, 8** in which the valve drive required for operating the intake and exhaust valves is arranged is connected to each of the two cylinder bank rows. Beneath the bearing for the crankshaft **10**, the crankcase **2, 4** has an oil suction space **12** (dry sump) in which the oil lubricant provided for lubrication of the bearings is collected. Oil return bores (not shown) are integrated into the engine, ensuring that the oil lubricant is returned to the oil suction space **12** in a targeted manner.

**[0014]** The dry sump oil suction space **12** is bordered by an oil bulkhead tank **14** with (wet sump) collecting spaces **16, 18** adjacent to the two side walls **14a, 14b** thereof. The two collecting spaces **16, 18** are interconnected by an interspace **22** which is formed between the lower wall **14c** of the oil bulkhead tank **14** and an oil pan cover **20**. An oil return pump **24** provided for the dry sump pressure lubrication has an oil suction line **26** connected to its intake end leading into the oil suction space **12**. An oil suction snorkel **28** which is attached to the end of the oil suction line **26** is arranged in the area of the lower wall **14c** of the oil bulkhead tank **14**. A line **30** is connected to the pressure side of the oil return pump **24** and leads as a branch line **30a** or **30b** to annular spaces **32, 34**, respectively, surrounding the cylinders "1" through "3" and "4" through "6".

**[0015]** The two annular spaces **32, 34** are each sealed by a gasket **36** (shown only in the left crankcase half **2**), e.g., in the form of a plastic gland, on the end face which faces the crank[case] space. As FIGS. 1 and 2 show, the annular spaces **32, 34** have openings **38** and/or passages on their lower lateral surfaces that are connected to the (wet sump) collecting spaces **16, 18**. The middle cylinder of each of the two cylinder bank rows Zyl.1-3 and Zyl.4-6 has a vent connection **40, 42**, which is connected to the top side of the annular spaces **32, 34** (at the top in relation to the installed position of the cylinder). On the basis of this shape of the oil return, it is possible to largely omit any externally installed oil lines. The oil lubricant can be defoamed via the annular spaces **32, 34** and air and/or gas components can be discharged to the outside through the vent connections **40, 42** so that separate oil/air separators are not needed.

**[0016]** As shown in FIG. 1, the wet sump collecting spaces **16, 18** and the dry sump oil suction space **12** are vented through appropriate lines **54, 56**. Likewise annular spaces **55** are provided in the upper area of the cylinders with coolant

flowing through the annular spaces to cool the cylinders, and the annular spaces are separated from annular spaces **32, 34** by a peripheral web **57**.

[0017] Suction pumps **44, 46** driven by the camshafts are provided in the two cylinder heads **6, 8** of the internal combustion engine, drawing the lubricant oil conveyed by a main delivery pump **48** into the cylinder heads **6, 8** and returning it via lines **50, 52** and the annular spaces **32, 34** to the (wet sump) collecting spaces **16, 18**.

[0018] The main delivery pump **48** is driven by an intermediate shaft (not shown in detail), and an oil suction line **58** is connected to its intake side and leads into the oil-collecting space **16**. An oil suction snorkel **60** which is placed near the oil pan cover **20** is also attached to the end of the oil suction line **58**. Oil supply lines (not shown in detail here) integrated into the crankcase **2, 4** are connected to the pressure side of the main delivery pump **48** and lead to the consumers, e.g., the main bearing points of the crankshaft and the camshaft.

1-6. (canceled)

7. Internal combustion engine using dry-sump-principle pressure lubrication, comprising a crankcase having an oil suction space in a lower part thereof so that lubricant oil is conveyed out of a sump through an oil return pump provided

with an oil suction line to an oil supply container while the lubricant oil in at least one of the oil supply container and the oil supply space is conveyed to consumers via a main delivery pump, wherein an annular space is arranged around cylinder groups as part of the lubricant oil conveying to the oil supply container.

8. Internal combustion engine according to claim 7, wherein the engine is an opposed-cylinder engine.

9. Internal combustion engine as claimed in claim 7, wherein the annular space is open to a crank space and is gasket-sealed.

10. Internal combustion engine as claimed in claim 7, wherein the annular space is vented.

11. Internal combustion engine as claimed in claim 7, wherein the oil supply space is integrated into the crankcase.

12. Internal combustion engine as claimed in claim 11, wherein oil supply space is integrated into the crankcase so as to be separated from the dry sump space by one or more bulkhead walls.

13. Internal combustion engine as claimed in claim 7, wherein the crankcase is of open deck configuration.

\* \* \* \* \*